



Ideal for restaurants, bars, canteens and much more!

Model #  
**F92EKDPS**  
Made Italy



Integral tank filters



Thermal & acoustic insulation

# “Catch the Wave!”

LAMBER dishwashers are less expensive at purchase and less expensive to use

- High temperature with booster
- Only 1/2 gallon of water per cycle
- Soap, rinse & drain pumps included
- 30 racks per hour
- Double panels, silent operation
- Digital readings (wash & rinse Temp.)
- Soft start motor
- 2, 3, 4, and 15 minutes cycles standard
- 3 racks (20" x 20") and 2 cutlery containers included

# F92EKDPS DISHWASHER

Dimensions	33" H x 23 ¾" W x 25 ¾" D
Volts	208/240
Hz	60
Amp	29
Circuit Breaker	40
Watts	6650
Cycle	2, 3, 4, 15 mins
Clearance	12 ½"
Door Opening	12.6"
Racks	per hour: 1-60
Rack Size	20" x 20"
Water Consumption	per cycle: ½ gal
Hard Water	120°F incoming water required



**lamber**  
Made in Italy



A variety of models  
to choose from

F92EKDPS - Under counter dishwasher

## Features and Benefits

**Stainless steel construction** AISI 304 18/10: 208 – 240 volts, single phase.

**Double skin with acoustic & thermal insulation** Less water consumption and energy efficient.

**Wash tank slanted with rounded edges** Seamless interior prevents leakage.

**Rotating stainless steel upper & lower wash arms** Longer lasting and easier to clean.

**Digital read out** For easy read.

**Automatic loading tank** Tank fills up as soon as the machine is turned on.

**Integral tank filter kit** Prevents food particles getting into the machine.

**Rinse aid dispenser and detergent pump** Dispenses detergent and rinse aid efficiently.

**Door opening safety device** Machine shuts off automatically.

**Thermo control** Guarantees selected temperature for every rinse cycle and when machine is not in use. **Security thermostat** Automatic booster shut off.

**Extractable control panel** For easy maintenance.

**Soft Start** Prevents over pressure water spillage and easy on glassware and china.

**Undercounter dishwasher** 1) F92EKDPS - (Soft Start) with booster, rinse, drain & soap pumps.  
2) F92EKS - (Soft Start) with booster, rinse, & soap pumps (without drain).

**Included accessories** (2) baskets, (1) general basket, (2) cutlery containers.

**Warranty** (2) year parts and labor.



SIZE:  
 23 5/8" W x 25 1/2" D x 32 1/4" H  
 Cycle period: 2-3-4 minutes  
 Capacity per hour:  
 Baskets/H: 30/20/15  
 Dishes/H: 540/360/270  
 Dishes per basket 12÷18

- Undercounter dishwasher;
- Stainless steel construction 18/10 AISI304;
- Wash cycle time: 2-3-4 minutes;
- Endless cycle: max 15 minutes;
- Soft touch electronic control panel;
- Temperature's electronic display;
- Double skin with thermic and acoustic insulation;
- Cycle start with soft-start system;
- Stainless steel lower and upper rotating wash arms;
- Stainless steel lower and upper rotating rinse arms;
- Self-washing slanted tank with rounded edges;
- Integral tank filters;
- Pressed self-cleaning door;
- Extractable control panel for an easy maintenance;
- Rinse aid dispenser;
- Detergent pump;
- Automatic tank loading;
- Door opening safety device;
- Thermocontrol: device which guarantees the selected temperature for every rinsing cycle even in case of non stop work;
- Security thermostat;
- Certifications: UL, UL Sanitation;




# F92EKS F92EKDPS

Accessories:  
 2 baskets for dishes;  
 1 generic basket;  
 2 cutlery containers;

OPTIONS  
 • Tank drain unit with filter,  
 • Stainless steel base H17,72 inch

These dimensions refer to F92EKS model  
 -note: Water Outlet 1" 1/4

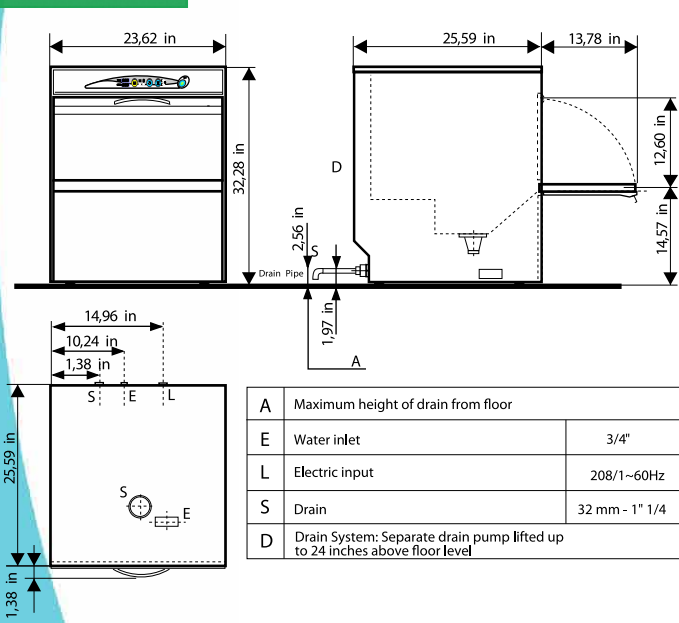

Specifications	F92EKS / F92EKDPS	
VOLTAGE	208 V1ph 60Hz	V
WASHING PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	34	A
PLATES CLEARANCE	12,60	inch
WORK HEIGHT	14,57	inch
TANK CAPACITY	4,8	Gal.
BOILER CAPACITY	1,6	Gal.
PUMP DELIVERY	69	Gal/min
WATER CONNECTION	131	°F
WATER CONSUMPTION PER CYCLE	2,40	Lt.
WATER CONSUMPTION PER HOUR	52	Lt.
WATER PRESSURE	20 ± 5	psi
WATER HARDNESS	5 ÷ 10	TH(°F)
RINSING WATER TEMPERATURE	179 ÷ 194	°F
WATER INLET	3/4"	inch
WATER OUTLET	1" 1/4 (3/4 - EKDPS)	inch
NET WEIGHT	152	Lbs
GROSS WEIGHT	165	Lbs
PACKING SIZE	24,80W x 28,37D x 44,09H	inch
NOISE LEVEL	<60	dB(A)

The manufacturer reserves the right to make modifications of materials and models without warning.